


ABUS GM2 - 500kg - 2-strängig (1125-718005)

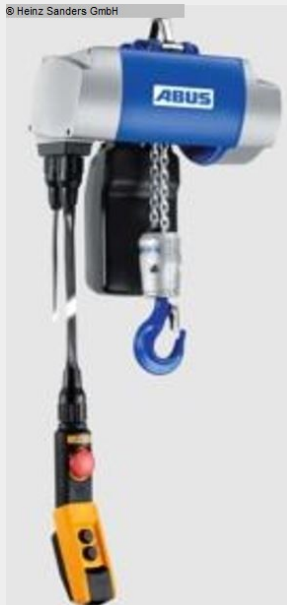

Control type
konventionell

Construction year
NEU

Machine no.
1125-718005

Make
ABUS

Location
49779 Niederlangen

Use as a stationary chain hoist
painted in color RAL 5017 traffic blue
Load capacity 500 kg
Hook path 4000 mm
Place of operation indoor operation
Calculation basis FEM 9.901
Engine group 2m / M5
Operating voltage 3~50Hz 400V
Direct control type of control
Degree of protection IP55
Lifting, 2-stage (pole-switchable) 1 / 4 m/min
Lifting power 0.09 / 0.35 kW
Duty cycle 60% ED
Circuits 360 c/h

Standard equipment trolley electrics
Solo trolley/hoist, ready-to-use, with

power connector.

Operation from the hallway using a pendant control

The pendant control with 2-stage pushbuttons is attached to the chain hoist.

Make: ABUS

Length of control cable including pendant control: 3310 mm

Control line calculation according to hook path

overload protection

Mechanical slip clutch as overload protection. The slip clutch is preset.

Machine attributes

weight max.: 0,5 t
stroke: 4000 mm

Machine images