


## ABUS GM2 - 500kg - 2-strängig (1125-718005)

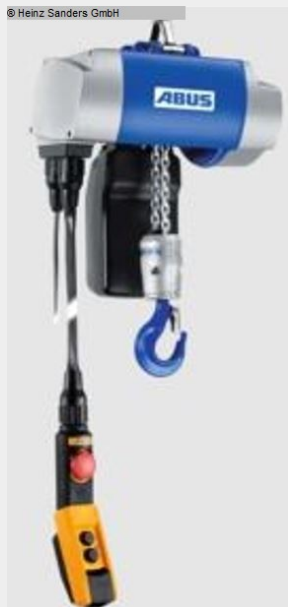

**Control type**  
konventionell

**Construction year**  
NEU

**Machine no.**  
1125-718005

**Make**  
ABUS

**Location**  
49779 Niederlangen

Use as a stationary chain hoist  
painted in color RAL 5017 traffic blue  
Load capacity 500 kg  
Hook path 4000 mm  
Place of operation indoor operation  
Calculation basis FEM 9.901  
Engine group 2m / M5  
Operating voltage 3~50Hz 400V  
Direct control type of control  
Degree of protection IP55  
Lifting, 2-stage (pole-switchable) 1 / 4 m/min  
Lifting power 0.09 / 0.35 kW  
Duty cycle 60% ED  
Circuits 360 c/h

Standard equipment trolley electrics  
Solo trolley/hoist, ready-to-use, with

power connector.

Operation from the hallway using a pendant control

The pendant control with 2-stage pushbuttons is attached to the chain hoist.

Make: ABUS

Length of control cable including pendant control: 3310 mm

Control line calculation according to hook path

overload protection

Mechanical slip clutch as overload protection. The slip clutch is preset.

**Machine attributes**

|              |         |
|--------------|---------|
| weight max.: | 0,5 t   |
| stroke:      | 4000 mm |

**Machine images**