


## ABUS GM4 - 1000kg - 2-strängig (1125-718006)

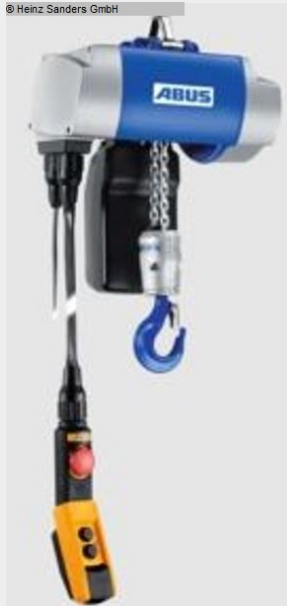

**Control type**  
konventionell

**Construction year**  
NEU

**Machine no.**  
1125-718006

**Make**  
ABUS

**Location**  
49779 Niederlangen

Use as a stationary chain hoist  
Chain hoist type GM 4 1000.5-2, 2 strands  
painted in color RAL 5017 traffic blue  
Load capacity 1 ton  
Hook path 4000 mm  
Place of operation indoor operation  
Calculation basis FEM 9.901  
Engine group 2m / M5  
Operating voltage 3~50Hz 400V  
Direct control type of control  
Degree of protection IP55  
Lifting, 2-stage (pole-changing) 1.3 / 5 m/min  
Lifting power 0.22 / 0.9 kW  
Duty cycle 60% ED  
Circuits 360 c/h

Standard equipment trolley electrics

Solo trolley/hoist, ready-to-use, with  
power connector.

Operation from the hallway using a pendant control  
The pendant control with 2-stage pushbuttons is attached to the chain hoist.  
Make: ABUS  
Length of control cable including pendant control: 3310 mm  
Control line calculation according to hook path

overload protection  
Mechanical slip clutch as overload protection. The slip clutch is  
preset.

**Machine attributes**

weight max.:	1,0 t
stroke:	4000 mm

**Machine images**