

ALZMETALL ALZSTAR 40 iTRONIC-V (1125-8100653)



Control type
konventionell

Machine no.
1125-8100653

Make
ALZMETALL

Location
48683 Ahaus

** NEW ALZMETALL MODEL RANGE **

7" TFT - LCD display with touch function:

- * Spindle speed setpoint
- * Actual speed display
- * Integrated drilling depth display
- * with touch zero point transfer
- * Virtual drilling depth scale in the display
- * Machine status displays and warnings in the display
- * Service information
- * Selectable user language: DE / EN / FR / ES / IT / NL / RU.

Furnishing:

- Infinitely variable speed setting by means of an adjusting lever
- automatic spindle feed with feed overload protection
- Spindle protection with electrical fuse
- Three separate buttons for clockwise rotation - counterclockwise rotation -

stop

- Mushroom pushbutton (latching) for EMERGENCY STOP
- Main switch, lockable
- Right and left rotation by contactor control
- Control voltage 24 volts
- Protection class IP 54
- Painting: DD textured paint, signal white RAL 9003 PANTONE 7545c, black

including special accessories:



- 25. Coolant system B.

Machine attributes

bore capacity in steel (diameter):	40.0 mm
throat:	293 mm
bore stroke:	120 mm
morse taper:	3 MK
table::	515 x 360 mm
turning speeds:	160 - 2250 U/min
column diameter:	115 mm
feed:	0.10 + 0.20 mm/U
T-slots:	2 x 14 x 224 mm
distance spindle /table:	117 / 701 mm
engine output:	1.45 / 1.90 kW
weight:	285 kg
Machine height:	1840 mm

Machine images



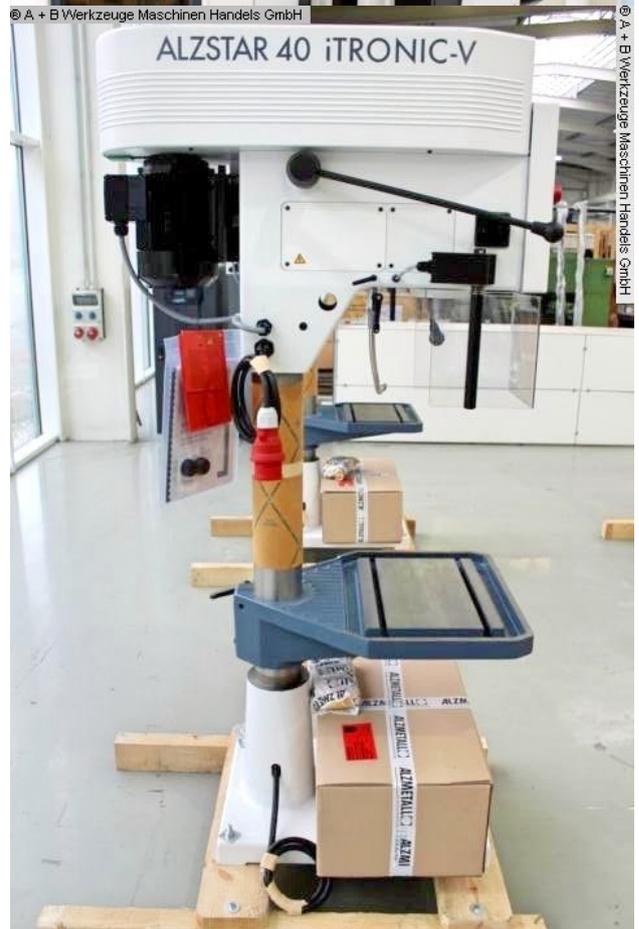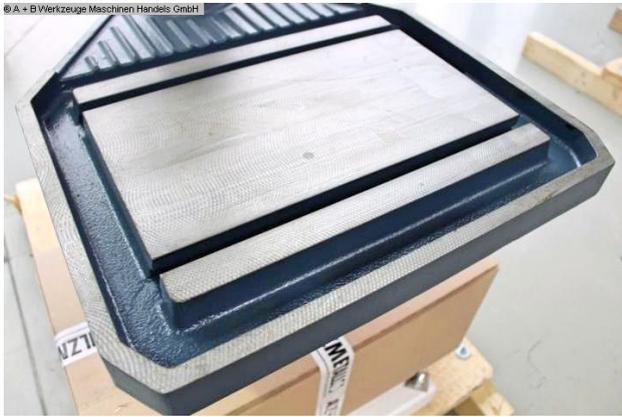

© A + B Werkzeuge Maschinen Handels GmbH

© A + B Werkzeuge Maschinen Handels GmbH