

DURMA DHGM 3006 (1125-9325282)



Control type
NC

Construction year
2003

Machine no.
1125-9325282

Make
DURMA

Location
Ahaus

Equipment:


- NC electro-hydraulic swing beam shear
- DURMA "ENC 100" digital control unit
- * Operator control, pivoting to the front left
- NC electro-motorized backgauge
- * Travel = 1.000 mm (X axis)
- * On recirculating ball screws
- Manual quick cutting gap adjustment
- * Via eccentric (right side column)
- Machine column with overhang (350 mm)
- 1x extra-long side stop, with mm scale
- 2x front support arms, with mm scale
- Ball transfer units in the front support table
- Front hinged finger guard
- 1x freely movable foot switch
- Rear safety device (protective grid)
- 2x emergency stop buttons at the front
- Operating instructions (PDF)

Machine attributes

sheet width:	3100 mm
plate thickness:	6.0 mm
thickness at "Niro-steel":	4.0 mm
down holder:	14 Stück
no. of strokes:	max. 15 Hub/min
cutting angle:	1°15
work height max.:	770 mm
column arm:	350 mm
oil volume:	170 ltr.
control:	ENC 100
oil volume:	170 l
total power requirement:	15.0 kW
weight:	7500 kg
range L-W-H:	3850 x 1950 x 1700 mm

Machine images



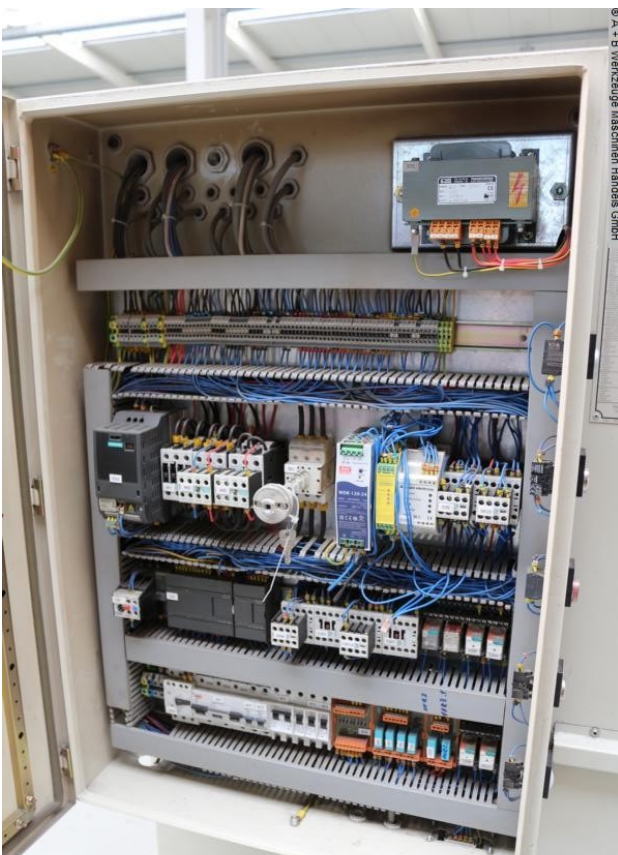

© A + B Werkzeuge Maschinen Handels GmbH

TYPE		DURMAZLAR 3006	
MANUFACTURING YEAR ANNO DI COSTRUZIONE ROK VÝROBY ROK PRODUKCE TILVERKNINGÅR	ANO DE FABRICACIÓN ANNEE FABRICATION VALMISTUSVUOSI BYGGÅR BOUWJAAR	2003	
MACHINE NO MÁSCIN. Nº MATRICOLA VÝROBNÍ ČÍSLO NUMER MASZYN SERIENUMMER	Nº DE SERIE Nº DE SERIE VALMISTUSNUMERO MASKINN SERIE - NUMMER	6076032715	
CAPACITY KAPAZITAT CAPACITA KAPACITA NACISK KAPACITEIT	CAPACIDAD CAPACITE TEHO KAPASITET CAPACITEIT	6	
STROKE HUB COURSE ZDVH SKOK SKOK	CARRERA COURSE ISKUNPTUUS SLAG SLAG	100	mm
STROKE IN A MINUTE HUBZAHN PRO MIN COLPI AL MINUTO POČET ZDVHU ZA MIN CYKLE NA MINUTE SLAG / MINUT	GOLPES POR MINUTO COUPS PAR MINUTE ISKULUKU SLAGANTALL PR. MIN AANTAL SLAGEN / MIN	15	1/min
LUBRICANT CAPACITY OL TANK KAPAZITAT CAPACITA SERBATOIO OLJAVNA NAPLJA POJEMNOSC ZBOJNKA OLJETANKENS RYMÖ	CAPACIDAD DEL LUBRICANTE CAPACITE RESERVOIR OLJYMÄÄRÄ KAPACITET OLJETANK TANK INHOUD	170	lt
TOP TOOL WEIGHT GEWICHT OBERWERKZEUG PESO UTENSILE SUPERIORE HMOTNOST H NÁSTROJE CIĘŻAR NARZ. GÓRNEGO OVERVERKTYGETS VIKT	PESO DEL PUNZÓN POIDS DU PONSÓN VLATYKALUN PAINO VEKT OVERVERKTOEY GEWICHT BOVENSTEMPEL	-	Kg
BOTTOM TOOL WEIGHT GEWICHT UNTERWERKZEUG PESO UTENSILE INFERIORE HMOTNOST S NÁSTROJE CIĘŻAR NARZ. DOLNEGO UNDERVERKTYGETS VIKT	PESO DE LA MATRIZ POIDS DE LA MATRICE ALATYKALUN PAINO VEKT UNDERVERKTOEY GEWICHT MATRIJS	-	Kg
WIDTH BREITE LARGHEZZA ŠÍŘKA SZEROKOŚĆ DUP	ANCHO LARGEUR LEVEYS BREEDTE BREEDTE	3100	mm
LENGTH LARGHEZZA DÉLKA DŁUGOŚĆ KÄNGD	LARGO LONGUEUR PITUUS LENGDE LENGTE	3850	mm
HEIGHT HÖHE ALTEZZA VÝŠKA WYSOKOŚĆ HOJD	ALTO HAUTEUR KORKEUS HOEYDE HOOGTE	1950	mm
WEIGHT GEWICHT PESO HMOTNOST CIĘŻAR MASKINVIKT	PESO POIDS PAINO VEKT GEWICHT	7500	Kg

DURMAZLAR MAKİNA SANAYİ ve TİCARET A.Ş.
Organize Sanayi Bölgesi 75. Yıl Bulvarı BURSA / TÜRKİYE
Tel : (0 224) 241 80 00 pbx. Fax : (0 224) 242 75 80

ETK - 1002 REV.3