Papenburg
Heinz Sanders GmbH
Friederikenstraße 100
26871 Papenburg
info@heinz-sanders.de

Niederlangen
Heinz Sanders GmbH
Fresenburger Weg 4
49779 Niederlangen
maschinen@heinz-sanders.de

Spelle
Heinz Sanders GmbH
Robert-Bosch-Straße 9
48480 Spelle
spelle@heinz-sanders.de

ERMAK CNC HGS 2100-8 MONO (1125-9325456)



Control type
CNC

Construction year
2021

Machine no.
1125-9325456

Make
ERMAK

Location
48683 Ahaus

** Current new price, including accessories: approx. 45.000 euros
** Very good condition (!!)
** Special price upon request

Robust electro-hydraulic CNC swing-beam shear
* Includes CYBELEC CNC touch-screen control
* Includes CNC electro-hydraulic cutting-gap adjustment

Equipment:
- CNC electro-hydraulic swing-beam shear
- Includes CYBELEC CNC touch-screen controller, model "CybTouch 8"
- CNC control functions include:
* Backgauge positioning (X-axis)
* Cutting-gap adjustment
* Piece counting

* Cutting-length limitation
* Material selection (including sheet thickness)
* Cutting-line illumination (for scribed-line cutting) ... and many more
- CNC-controlled motorized backgauge
* Travel range: 0.0 ? 1,000 mm (X-axis)
* Driven by recirculating ball screws
* Automatically retracts/lifts at maximum travel distance to accommodate longer workpieces
* Includes selectable "swing-away" retraction function
* Positioning accuracy: 0.1 mm
* Travel speed: 80.0 mm/sec. - 1x side gauge, with T-slot and mm scale
- 2x front support arms, with T-slot and mm scale
- Ball transfers in the front support table
- Hinged finger guard, with safety switch
* Finger guard with viewing windows for line-of-sight cutting
- Cutting line illumination (shadow line)
- BOSCH/HOERBIGER hydraulic system
- SIEMENS electrical system
- Light curtain behind the machine (safety device)
- 1x mobile foot switch
- CE mark/Declaration of Conformity
- Operating manual + electrical schematic + hydraulic schematic

Machine attributes

sheet width:	2100 mm
plate thickness:	8.0 mm ST 42
thickness at "Niro-steel":	6.0 mm VA
cutting angle:	1.2 Grad
no. of strokes:	28 Hub/min
down holder:	11 Stück
back stop - adjustable:	1.000 mm
table height:	800 mm
control:	CYBELEC
oil volume:	150 ltr.
engine output:	11.0 kW
weight:	5200 kg
range L-W-H:	3010 x 2100 x 1640 mm

Machine images





HEINZ SANDERS
MASCHINEN
WERKZEUGE
SCHWEISSTECHNIK

Maschinen

www.heinz-sanders.de

Papenburg
Heinz Sanders GmbH
Friederikenstraße 100
26871 Papenburg
info@heinz-sanders.de

Niederlangen
Heinz Sanders GmbH
Fresenburger Weg 4
49779 Niederlangen
maschinen@heinz-sanders.de

Spelle
Heinz Sanders GmbH
Robert-Bosch-Straße 9
48480 Spelle
spelle@heinz-sanders.de





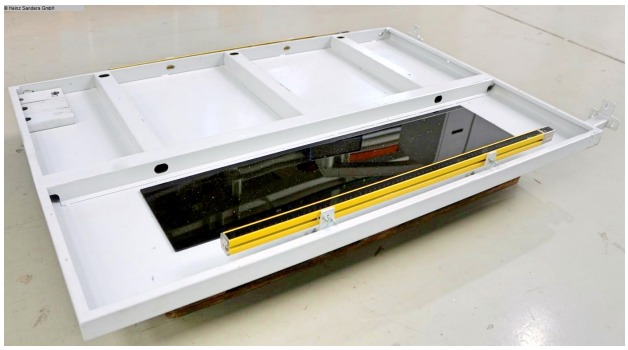

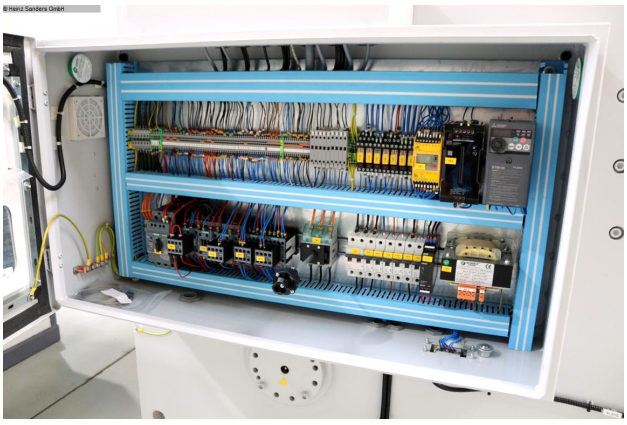

Papenburg
Heinz Sanders GmbH
Friederikenstraße 100
26871 Papenburg
info@heinz-sanders.de

Niederlangen
Heinz Sanders GmbH
Fresenburger Weg 4
49779 Niederlangen
maschinen@heinz-sanders.de

Spelle
Heinz Sanders GmbH
Robert-Bosch-Straße 9
48480 Spelle
spelle@heinz-sanders.de

