
Papenburg
Heinz Sanders GmbH
Friederikenstraße 100
26871 Papenburg
info@heinz-sanders.de

Niederlangen
Heinz Sanders GmbH
Fresenburger Weg 4
49779 Niederlangen
maschinen@heinz-sanders.de

Spelle
Heinz Sanders GmbH
Robert-Bosch-Straße 9
48480 Spelle
spelle@heinz-sanders.de

FINKEN VH 6-500 (1008-8531720)

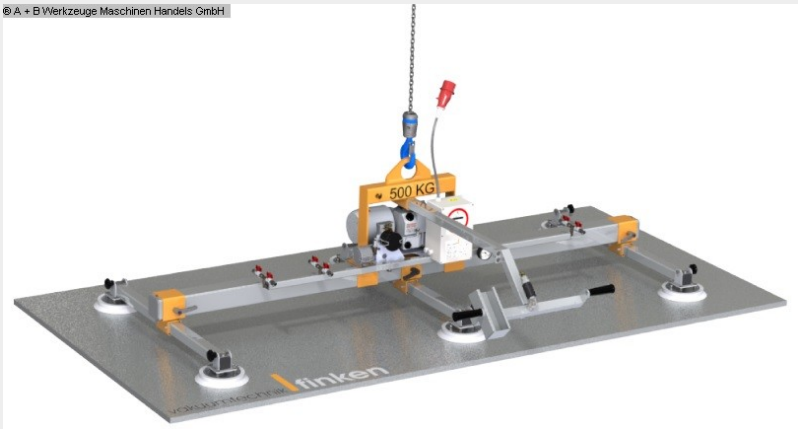

Control type
konventionell

Machine no.
1008-8531720

Make
FINKEN

Location
Ahaus

Furnishing :
- for the horizontal transport of smooth, dry
  and airtight panels
- Robust supporting structure made of steel
- Painted in RAL 2000 with low weight
- Galvanized longitudinal beam with a length of 2,400 mm
- 3x galvanized crossbeams with a length of 1,000 mm
- 6x springy, articulated and adjustable suction cup holders
- 6x suction cups Ø 215 mm
- Low-maintenance, very high-quality, dry-running rotary vane vacuum pump
- with a suction capacity of 8 m³/h and a final vacuum of 85% (150 mbar)
- 3 phases 230/400 V + PE, 50 Hz, with cable (approx. 0.5 m long)
- Operating handle can be extended to 1,000 mm from the center of the traverse
- Sturdy metal case for your crane control
- Operation "suction / release" by hand slide valve
- Control and safety device for vacuum lifters
* Robust control box.
* Contactor circuit for the vacuum pump
* Safety warning device with audible alarm

* Vacuum gauge with danger zone indicator
* Large vacuum storage tank with safety check valve
* Double actuation when releasing the load
- Fine dust filter to protect the vacuum pump
- Documentation


* Special accessories included:
- 6x ball valves to switch off individual suction cups
* so that smaller formats can also be lifted
* without having to move suction cups or traverses
- Spiral connection cable small helix
* with an extension length of 3,500 mm, version as
* Extension cable with CEE plug and coupling
* is routed to the lifting device next to the load chain

Machine attributes

carrying capacity:	500 kg.
number of suction cups:	6 Stück
suction cup dia.:	215 mm
0:	8,0 m³/h
tool adaptor:	Kranöse 80,0 mm
voltage:	400 V
total power requirement:	0,18 kW
weight of the machine ca.:	120 kg.
dimensions of the machine ca.:	2400 x 1100 x 584 mm

Machine images



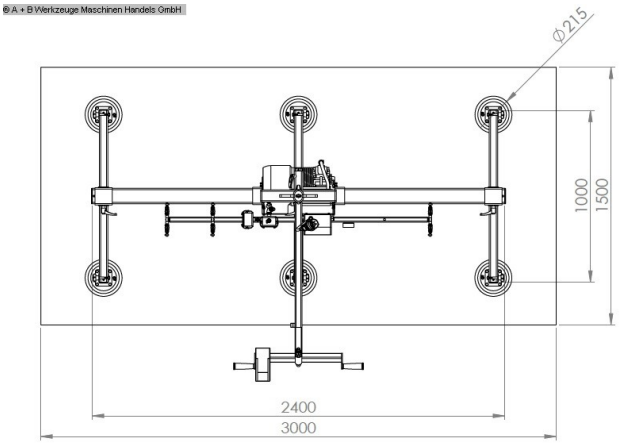

Papenburg
Heinz Sanders GmbH
Friederikenstraße 100
26871 Papenburg
info@heinz-sanders.de

Niederlangen
Heinz Sanders GmbH
Fresenburger Weg 4
49779 Niederlangen
maschinen@heinz-sanders.de

Spelle
Heinz Sanders GmbH
Robert-Bosch-Straße 9
48480 Spelle
spelle@heinz-sanders.de

© A + B Werkzeuge Maschinen Handels GmbH

