



GRAULE ZS 200 N (1125-8164011)



Control type
 konventionell

Machine no.
 1125-8164011

Make
 GRAULE

Location
 48683 Ahaus

- Crosscut and miter saws for crosscuts
- Miter adjustment on both sides (60°/45°), with fixed stops
- Shift cut on both sides (60°/45°), with fixed stops
- Stable cast iron construction
- Precise ball bearing guidance of the tool slide
- hardened and welded steel shafts
- manual saw feed
- Saw blade infinitely adjustable in height
- socket for opt. suction

Furnishing :

- 3.0 kW motor for ALU cuttings
- Saw blade can be tilted via handwheel and worm gear (shift cut)
- Saw blade diameter 520 mm
- Saw blade mounting hole 50 mm
- Saw blade speed 2,800 rpm
- 400 Volt / 3 kW (S6/40%) motor with brake and automatic.
- Star-delta motor circuit
- Machine weight approx. 250 kg

Cutting data :

- Cutting length at 90° = 420 mm
- Cutting height at 90° = 200 mm
- Cutting length at 45° = 295 mm
- Cutting height at 45° = 140 mm


** Special accessories included:

- HM saw blade 520x3.6/3.0x50 mm
- Hydraulic feed brake, continuously adjustable
- Pneumatic material clamping from above
best. from : 2 vertical clamping cylinders
adjustable with lever valve
- pneumaschine saw blade spray device
- Machine can be tilted from the front on both sides using a hand crank
- Machine stand

Machine attributes

saw blade diameter:	520 x Ø 50 mm
cutting diameter:	200 mm
cutting length:	420 mm
Cutting height at 45°:	140 mm
dimensions of saw-blade:	520x3,6/3,0x50 mm
turning speeds:	2800 U/min
Dust suction hood:	100 mm
total power requirement:	3,0 kW
weight of the machine ca.:	310 kg.
range L-W-H:	1400 x 900 x 1650 mm

Machine images

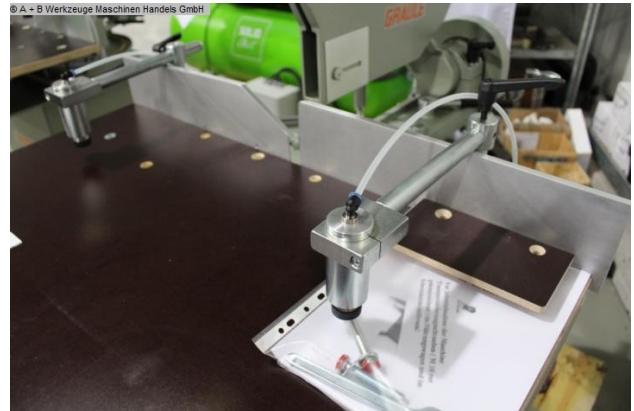

Papenburg
Heinz Sanders GmbH
Friederikenstraße 100
26871 Papenburg
info@heinz-sanders.de

Niederlangen
Heinz Sanders GmbH
Fresenburger Weg 4
49779 Niederlangen
maschinen@heinz-sanders.de

Spelle
Heinz Sanders GmbH
Robert-Bosch-Straße 9
48480 Spelle
spelle@heinz-sanders.de

