

Maschinen www.heinz-sanders.de

Papenburg
Heinz Sanders GmbH
Friederikenstraße 100
26871 Papenburg
info@heinz-sanders.de

Control type konventionell

Machine no. 1125-7365

NEU


Make OPTIdrill

Construction year

Niederlangen Heinz Sanders GmbH Fresenburger Weg 4 49779 Niederlangen maschinen@heinz-sanders.de

Heinz Sanders GmbH Robert-Bosch-Straße 9 48480 Spelle spelle@heinz-sanders.de

OPTIdrill DP 33V Aktions-Set (1125-7365)

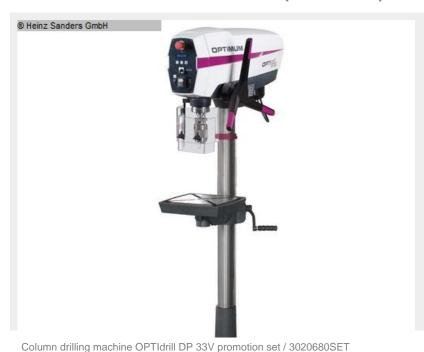

- * Industrial engine
- * Quiet running spindle thanks to new spindle design
- * Machine operation with safety electronics in 24 V direct current

With an electronically controllable drive in a modern design

- * Guaranteed concentricity = 0.02 mm in the measured drilling spindle
- * Clockwise/counterclockwise rotation
- * Precision spindle bore
- * Control panel with user-friendly, dirt and water resistant
- * Membrane keyboard
- * RPM display
- * Separate emergency stop button
- * Tapping function
- * Precisely crafted, stable drill table with diagonal T-slots with all-round cooling water channel, can be tilted sideways by $\pm45^\circ$ and rotated by 360°
- * Drilling depth stop
- * LED machine light integrated in the drill head

- * V-belt cover with safety switch
- * Thick-walled steel column for high power absorption and stability
- * Solid, large base plate with T-slots
- * Execution of the entire machine

Scope of delivery:

- Keyless drill chuck 0 16 mm
- T-Nuts
- -expectors
- Operating tool
- BMP 160 machine vice

Machine attributes

bore capacity in steel (diameter): 30 mm throat: 270 mm bore stroke: 125 mm

Motor output: 9

speeds: 70 - 2800 U/min

Machine images

® Heinz Sanders GmbH



® Heinz Sanders GmbH

