

ERMAK CNC HGS 3100-6 HH MONO (1125-8321044)



Control type
konventionell

Machine no.
1125-8321044

Make
ERMAK

Location
Ahaus

electr. / hydraulic CNC swing cut shears
* with CYBELEC CNC touch screen control
* with electr. / hydr. Kerf adjustment

Furnishing:

- CNC electr. / hydraulic swing cut shears
- CYBELEC CNC touch screen controller, model CybTouch 8
- * Backgauge preselection - X axis
- * Cutting gap adjustment
- * Number of pieces
- * Cutting length limitation
- * Material preselection, including sheet thickness
- * Cutting line lighting
- motorized backgauge, travel = 1,000 mm (X axis)

* on ball screws

* autom. Can be folded up at max.travel, for longer cuts

- 1x side stop

- 2x front support arms

- Ball casters in the front support table

- hinged finger protection, with safety switch

- BOSCH / HOERBIGER hydraulic system

- SIEMENS electrical system

- light barrier behind the machine (safety device)

- foot switch

- CE mark / declaration of conformity

- User manual: machine and control in German

** including special equipment:

- pneumatic sheet metal holding device (monoblock)


Machine attributes

sheet width:	3100 mm
plate thickness:	6,0 mm
thickness at "Niro-steel":	4,0 mm
distance between columns:	3100 mm
no. of strokes:	18 Hub/min
down holder:	14 Stück
oil volume:	150 ltr.
cutting angle:	1,2 °
control:	CYBELEC CybTouch
total power requirement:	11,0 kW
weight:	6300 kg
range L-W-H:	4.000 x 2.100 x 1.640 mm

Machine images



© A + B Werkzeuge Maschinen Handels GmbH

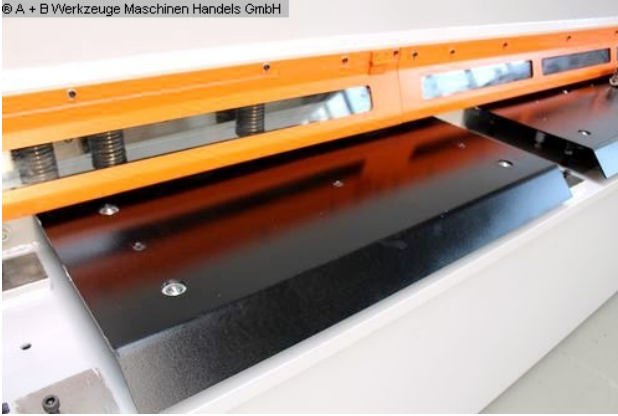

© A + B Werkzeuge Maschinen Handels GmbH



© A + B Werkzeuge Maschinen Handels GmbH



© A + B Werkzeuge Maschinen Handels GmbH



© A + B Werkzeuge Maschinen Handels GmbH



© A + B Werkzeuge Maschinen Handels GmbH



